

YOUR PROFESSIONAL-CLASS PRODUCT

Legacy 20-Gauge Smooth Steel Entry Door with Clear Glass




OUTSIDE VIEW




INSIDE VIEW

SIZING

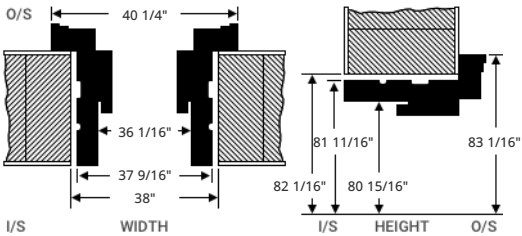

HANDING



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.30

0.19

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.19

Air Infiltration (cfm/ft2)

<= 0.04

CPD: PRD-N-88-33473-00001

605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION

Job: Schuetz
PO #JASON
Order #13323518-1
Qty: 1

DETAILS

Legacy Single Entry Door in FrameSaver Frame


36" x 80" Nominal Size
Unit Size: 37 9/16" x 81 11/16"
Frame Depth: 4 9/16"
2" Standard Brickmold
Right Hand Inswing - Inside Looking Out
2 Panel 430 Style 20-Gauge Smooth Steel Door
ComforTech DC
Plugged Trim
Snow Mist White Inside and Outside
Hardware
All Hardware in Black Finish
Georgian Lockset
Key Order Alike
Thumbturn Deadbolt
Key Order Alike
Frame
Textured Snow Mist White Aluminum Frame Cladding
Snow Mist White Inside Frame
Mill Finish ZAC Auto-Adjusting Threshold (5 5/8" Depth)
Black Ball Bearing Hinges
Security Plate

INFORMATION AND WARNINGS


A bronze threshold is available that would be a better compliment to the selected hardware.

YOUR PROFESSIONAL-CLASS PRODUCT

Legacy 20-Gauge Smooth Steel Entry Door

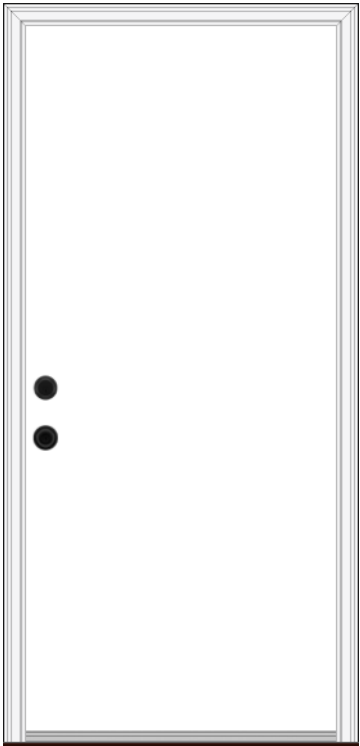


OUTSIDE VIEW

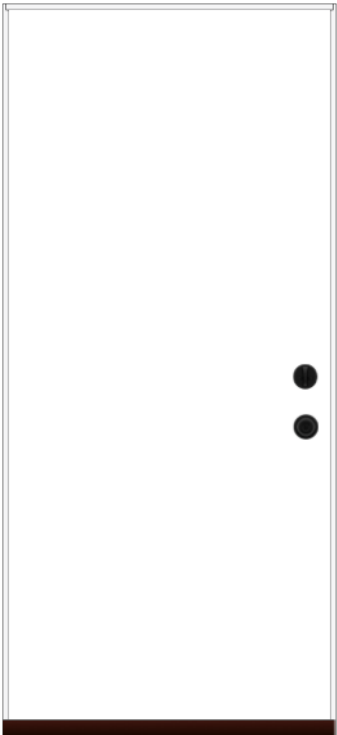


INSIDE VIEW

SIZING

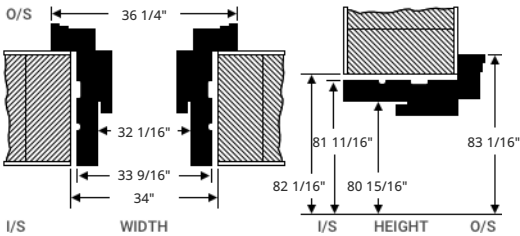

HANDING



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.17

0.01

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.00

Air Infiltration (cfm/ft²)

<= 0.04



ENERGY STAR® Certified
In All 50 States.

CPD: PRD-N-88-33275-00001

605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION

Job: Schuetz

PO #JASON

Order #13323518-2

Qty: 1

DETAILS

Legacy Single Entry Door in FrameSaver Frame

32" x 80" Nominal Size

Unit Size: 33 9/16" x 81 11/16"

Frame Depth: 4 9/16"

2" Standard Brickmold

Right Hand Inswing - Inside Looking Out

001 Style 20-Gauge Smooth Steel Door

Snow Mist White Inside and Outside

Hardware

All Hardware in Black Finish

Georgian Lockset

Key Order Alike

Thumbturn Deadbolt

Key Order Alike

Frame

Textured Snow Mist White Aluminum Frame Cladding

Snow Mist White Inside Frame

Mill Finish ZAC Auto-Adjusting Threshold (5 5/8" Depth)

Black Ball Bearing Hinges

Security Plate

INFORMATION AND WARNINGS

A bronze threshold is available that would be a better compliment to the selected hardware.

YOUR PROFESSIONAL-CLASS PRODUCT

Legacy 20-Gauge Smooth Steel Entry Door with Clear Glass




OUTSIDE VIEW




INSIDE VIEW

SIZING

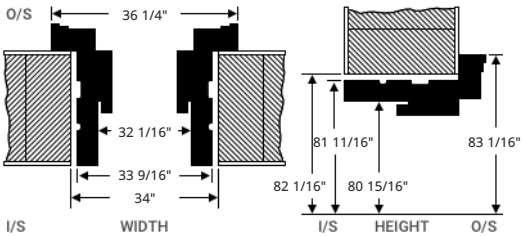

HANDING



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.30

0.19

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.19

Air Infiltration (cfm/ft²)

<= 0.04

CPD: PRD-N-88-33473-00001

605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION

Job: Schuetz
PO #JASON
Order #13323518-3
Qty: 1

DETAILS

Legacy Single Entry Door in FrameSaver Frame

32" x 80" Nominal Size
Unit Size: 33 9/16" x 81 11/16"
Frame Depth: 4 9/16"
2" Standard Brickmold
Left Hand Inswing - Inside Looking Out
2 Panel 430 Style 20-Gauge Smooth Steel Door
ComforTech DC
Plugged Trim
Snow Mist White Inside and Outside
Hardware
All Hardware in Black Finish
Georgian Lockset (2 3/8" Backset)
Key Order Alike
Thumbturn Deadbolt (2 3/8" Backset)
Key Order Alike
Frame
Textured Snow Mist White Aluminum Frame Cladding
Snow Mist White Inside Frame
Mill Finish ZAC Auto-Adjusting Threshold (5 5/8" Depth)
Black Ball Bearing Hinges
Security Plate

INFORMATION AND WARNINGS

A bronze threshold is available that would be a better compliment to the selected hardware.

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 609 - Picture Window

605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION

Job: Schuetz


PO #JASON

Order #13323518-4

Qty: 1

DETAILS

Endure Window - EN600 Series
609 - Picture Window
White
Exact Size: 51 7/8" x 53 5/8"
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Double Strength Glass (1/8" per pane)
3/4" IG Thickness

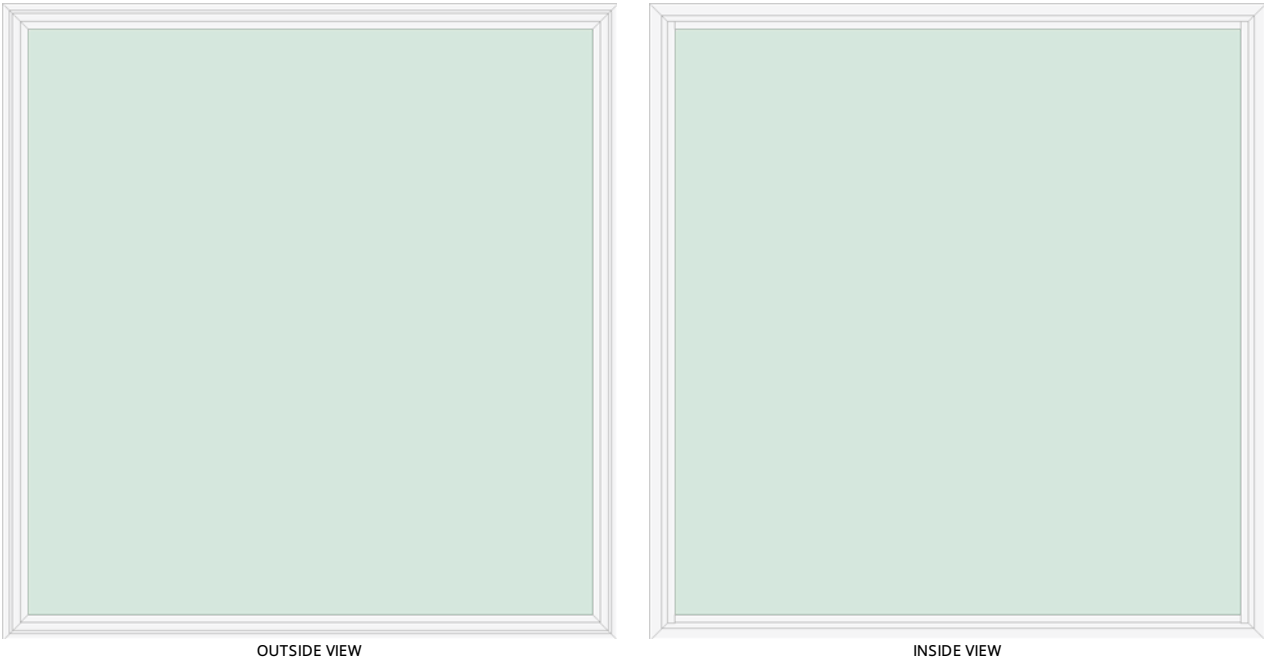

SIZING	Structural	ENERGY
Opening Width Range: 52 1/8" to 52 3/8" Opening Height Range: 53 7/8" to 54 1/8" Window Size: 51 7/8" x 53 5/8" United Inches: 106 Fixed Glass Size: 47 11/16" x 49 7/16" x 3/4" Fixed Glass Viewable Size: 46 13/16" x 48 1/2"	Air: 0.01 cfm/ft2 @ 1.57 psf ASTM E 283 Water: 12.11 psf ASTM E 547 Structural: CW-PG50 141mph AAMA/WDMA/CSA 101/11.2/A440-08 and 11 DP 50	ENERGY PERFORMANCE RATINGS U-Factor (U.S./I-P)Solar Heat Gain Coefficient 0.260.30 ADDITIONAL PERFORMANCE RATINGS Visible TransmittanceCondensation Resistance 0.5759.00 Air Infiltration (cfm/ft2) ≤ 0.01 CPD: PRD-N-100-00802-00001

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung


605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION


Job: Schuetz
PO #JASON
Order #13323518-5
Qty: 4

DETAILS

Endure Window - EN600 Series
601 - Double Hung
White
Exact Size: 29 7/8" x 49 3/4"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Vent Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Full Screen (White) with BetterVue Screen Mesh
With Screen Mullion
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Double Strength Glass (1/8" per pane)
3/4" IG Thickness
Colonial (Standard) Flat Grid - 1V x 1H
White Grids

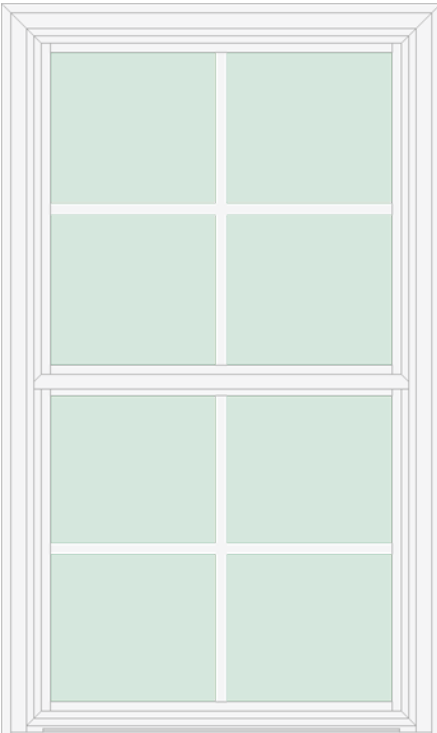

OUTSIDE VIEW

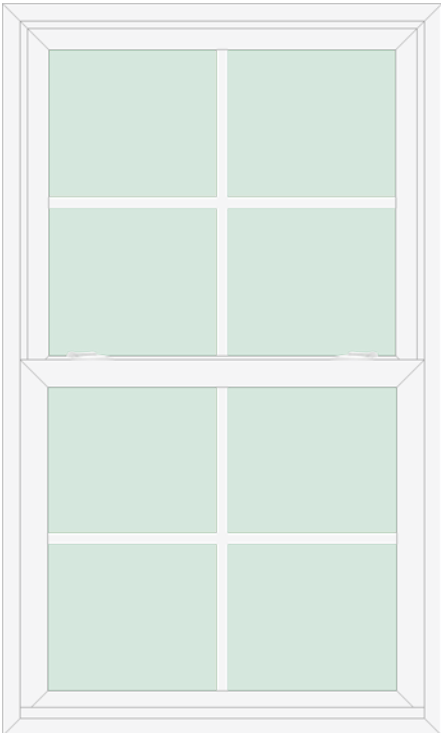

INSIDE VIEW

SIZING

Opening Width Range: 30 1/8" to 30 3/8"
Opening Height Range: 50" to 50 1/4"
Window Size: 29 7/8" x 49 3/4"
United Inches: 80
Egress Size: 24 7/8" x 17 19/32"
Egress Square Foot: 3.0444
Egress Meets Criteria: No
Top Sash Size: 25 7/8" x 23 7/16"
Top Glass Size: 24 1/16" x 21 11/16" x 3/4"
Top Glass Viewable Size: 23 1/16" x 20 11/16"
Bottom Sash Size: 26 7/8" x 24 7/16"
Bottom Glass Size: 24 1/16" x 21 11/16" x 3/4"
Bottom Glass Viewable: 23 1/16" x 20 11/16"
Size:
Full Screen: 26 5/16" x 47 1/8"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.5.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient
0.27 **0.25**


ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance Condensation Resistance
0.48 **60.00**
Air Infiltration (cfm/ft2)
<= 0.05


CPD: PRD-N-101-01633-00006
STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung

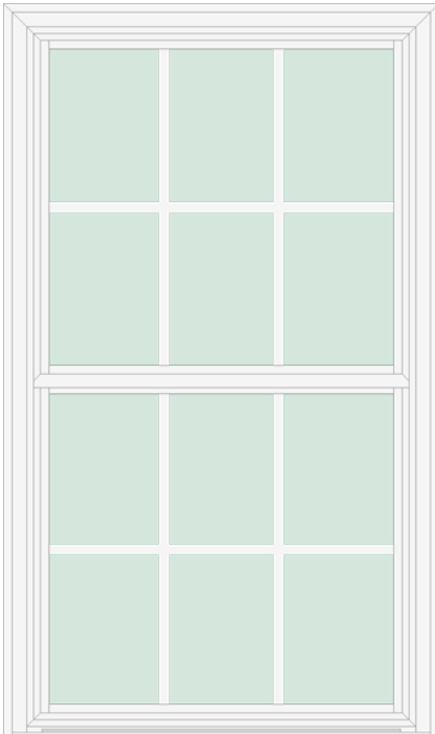

OUTSIDE VIEW

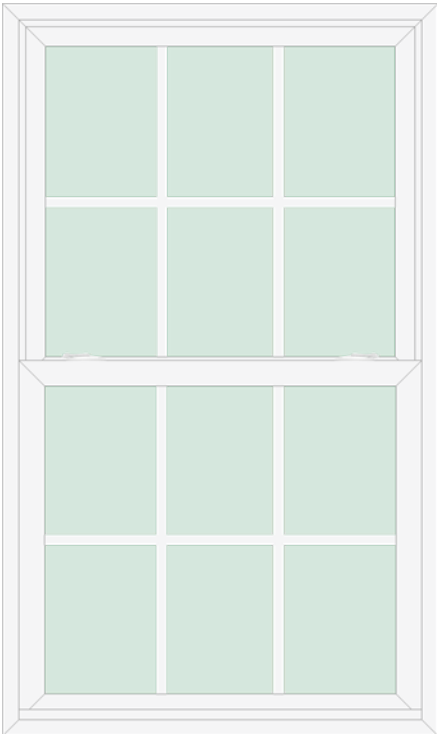

INSIDE VIEW

605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION

Job: Schuetz
PO #JASON
Order #13323518-6
Qty: 1

DETAILS

Endure Window - EN600 Series

601 - Double Hung
White
Exact Size: 31 7/8" x 53 5/8"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Vent Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Full Screen (White) with BetterVue Screen Mesh
With Screen Mullion
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Double Strength Glass (1/8" per pane)
3/4" IG Thickness
Colonial (Standard) Flat Grid - 2V x 1H
White Grids

SIZING

Opening Width Range: 32 1/8" to 32 3/8"
Opening Height Range: 53 7/8" to 54 1/8"
Window Size: 31 7/8" x 53 5/8"
United Inches: 86
Egress Size: 26 7/8" x 19 15/32"
Egress Square Foot: 3.6392
Egress Meets Criteria: No
Top Sash Size: 27 7/8" x 25 3/8"
Top Glass Size: 26 1/16" x 23 5/8" x 3/4"
Top Glass Viewable Size: 25 1/16" x 22 5/8"
Bottom Sash Size: 28 7/8" x 26 3/8"
Bottom Glass Size: 26 1/16" x 23 5/8" x 3/4"
Bottom Glass Viewable: 25 1/16" x 22 5/8"
Size:
Full Screen: 28 5/16" x 51"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.5.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS
U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.27 0.25

ADDITIONAL PERFORMANCE RATINGS
Visible Transmittance Condensation Resistance


0.48 60.00

Air Infiltration (cfm/ft2)
<= 0.05


CPD: PRD-N-101-01633-00006
STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung

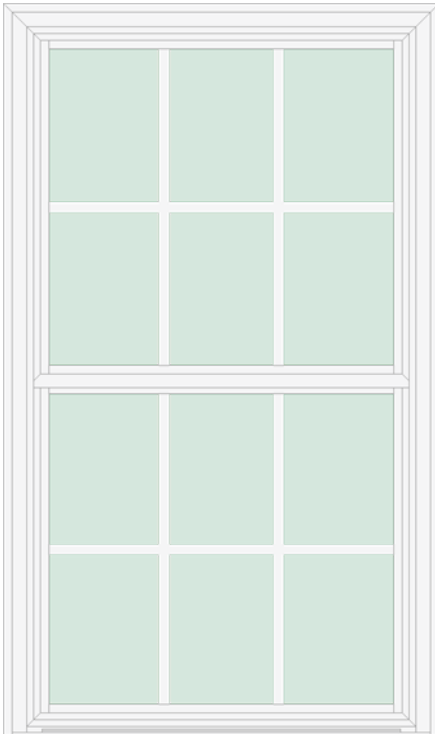

OUTSIDE VIEW

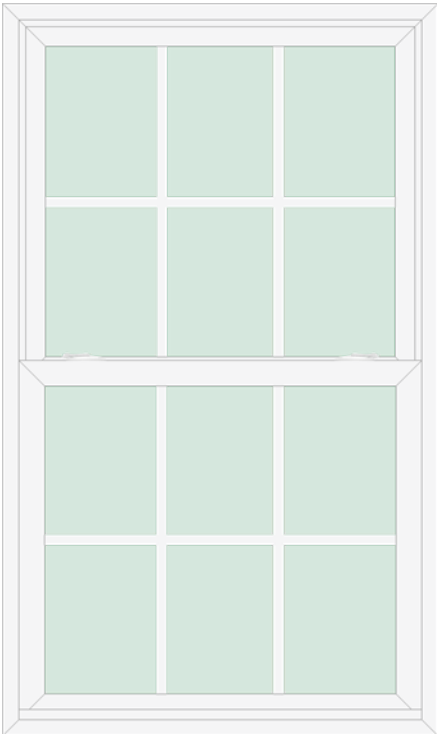

INSIDE VIEW

605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION

Job: Schuetz
PO #JASON
Order #13323518-7
Qty: 4

DETAILS

Endure Window - EN600 Series

601 - Double Hung
White
Exact Size: 31 7/8" x 53 5/8"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Vent Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Full Screen (White) with BetterVue Screen Mesh
With Screen Mullion
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Double Strength Glass (1/8" per pane)
3/4" IG Thickness
Colonial (Standard) Flat Grid - 2V x 1H
White Grids

SIZING

Opening Width Range: 32 1/8" to 32 3/8"
Opening Height Range: 53 7/8" to 54 1/8"
Window Size: 31 7/8" x 53 5/8"
United Inches: 86
Egress Size: 26 7/8" x 19 15/32"
Egress Square Foot: 3.6392
Egress Meets Criteria: No
Top Sash Size: 27 7/8" x 25 3/8"
Top Glass Size: 26 1/16" x 23 5/8" x 3/4"
Top Glass Viewable Size: 25 1/16" x 22 5/8"
Bottom Sash Size: 28 7/8" x 26 3/8"
Bottom Glass Size: 26 1/16" x 23 5/8" x 3/4"
Bottom Glass Viewable: 25 1/16" x 22 5/8"
Size:
Full Screen: 28 5/16" x 51"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.5.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS
U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.27 0.25

ADDITIONAL PERFORMANCE RATINGS
Visible Transmittance Condensation Resistance

0.48 60.00

Air Infiltration (cfm/ft2)
<= 0.05

CPD: PRD-N-101-01633-00006
STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung


605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION


Job: Schuetz
PO #JASON
Order #13323518-8
Qty: 2

DETAILS

Endure Window - EN600 Series
601 - Double Hung
White
Exact Size: 29 7/8" x 45 3/4"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Vent Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Full Screen (White) with BetterVue Screen Mesh
With Screen Mullion
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Double Strength Glass (1/8" per pane)
3/4" IG Thickness
Colonial (Standard) Flat Grid - 1V x 1H
White Grids

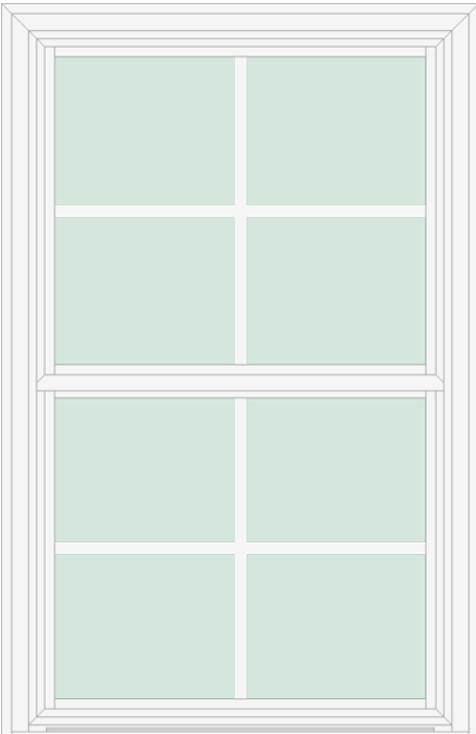

OUTSIDE VIEW

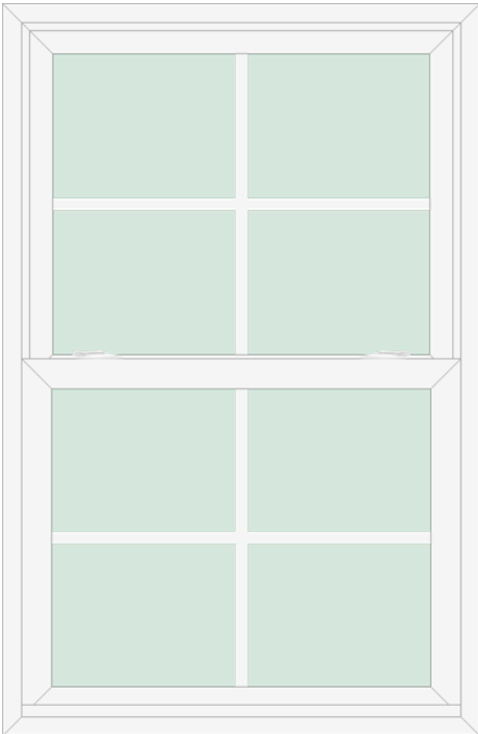

INSIDE VIEW

SIZING

Opening Width Range: 30 1/8" to 30 3/8"
Opening Height Range: 46" to 46 1/4"
Window Size: 29 7/8" x 45 3/4"
United Inches: 76
Egress Size: 24 7/8" x 15 19/32"
Egress Square Foot: 2.6990
Egress Meets Criteria: No
Top Sash Size: 25 7/8" x 21 7/16"
Top Glass Size: 24 1/16" x 19 11/16" x 3/4"
Top Glass Viewable Size: 23 1/16" x 18 11/16"
Bottom Sash Size: 26 7/8" x 22 7/16"
Bottom Glass Size: 24 1/16" x 19 11/16" x 3/4"
Bottom Glass Viewable: 23 1/16" x 18 11/16"
Size:
Full Screen: 26 5/16" x 43 1/8"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.S.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS
U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.27 0.25

ADDITIONAL PERFORMANCE RATINGS
Visible Transmittance Condensation Resistance

0.48 60.00

Air Infiltration (cfm/ft2)

<= 0.05

CPD: PRD-N-101-01633-00006
STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung


605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION


Job: Schuetz
PO #JASON
Order #13323518-9
Qty: 1

DETAILS

Endure Window - EN600 Series
601 - Double Hung
White
Exact Size: 31 5/8" x 53 5/8"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Vent Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Full Screen (White) with BetterVue Screen Mesh
With Screen Mullion
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Double Strength Glass (1/8" per pane)
3/4" IG Thickness
Colonial (Standard) Flat Grid - 1V x 1H
White Grids

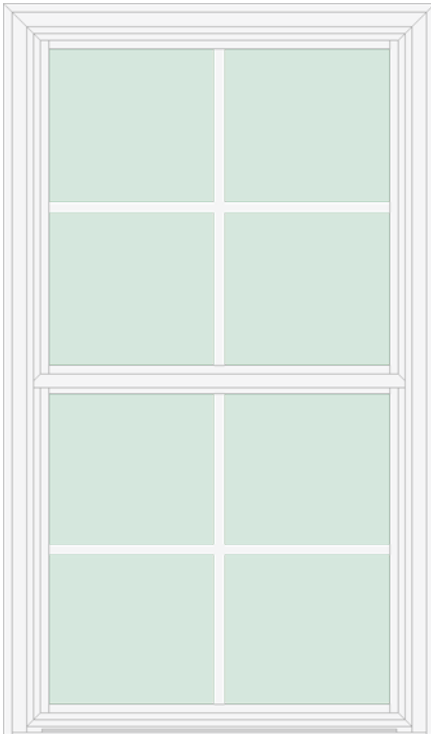

OUTSIDE VIEW

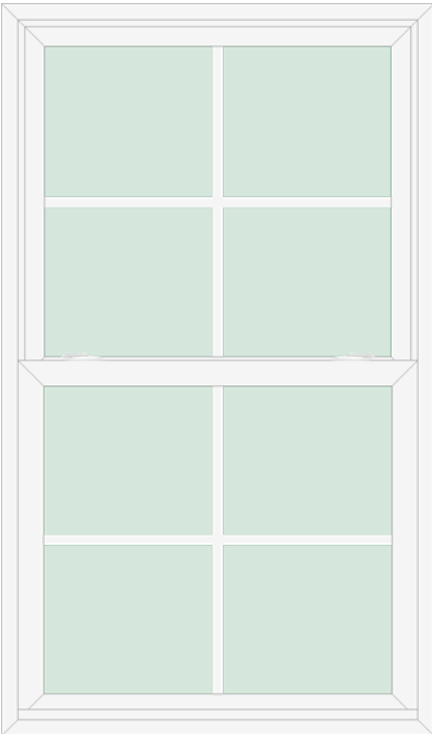

INSIDE VIEW

SIZING

Opening Width Range: 31 7/8" to 32 1/8"
Opening Height Range: 53 7/8" to 54 1/8"
Window Size: 31 5/8" x 53 5/8"
United Inches: 86
Egress Size: 26 5/8" x 19 15/32"
Egress Square Foot: 3.6053
Egress Meets Criteria: No
Top Sash Size: 27 5/8" x 25 3/8"
Top Glass Size: 25 13/16" x 23 5/8" x 3/4"
Top Glass Viewable Size: 24 13/16" x 22 5/8"
Bottom Sash Size: 28 5/8" x 26 3/8"
Bottom Glass Size: 25 13/16" x 23 5/8" x 3/4"
Bottom Glass Viewable: 24 13/16" x 22 5/8"
Size:
Full Screen: 28 1/16" x 51"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.5.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS
U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.27 0.25

ADDITIONAL PERFORMANCE RATINGS
Visible Transmittance Condensation Resistance

0.48 60.00


Air Infiltration (cfm/ft2)

<= 0.05


CPD: PRD-N-101-01633-00006
STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 631 - 1-Lite Awning (Operable)

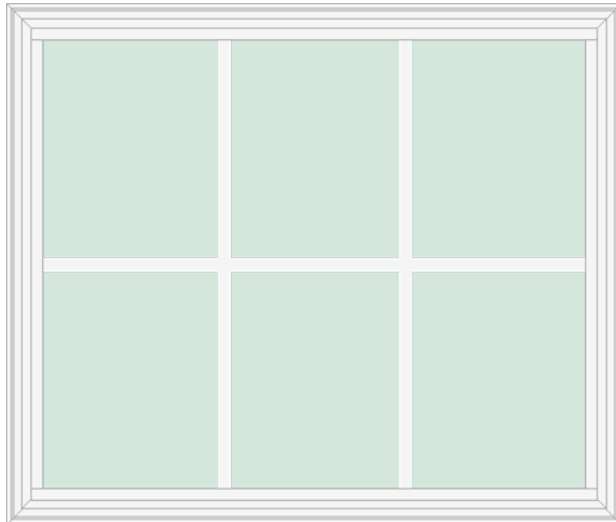

OUTSIDE VIEW

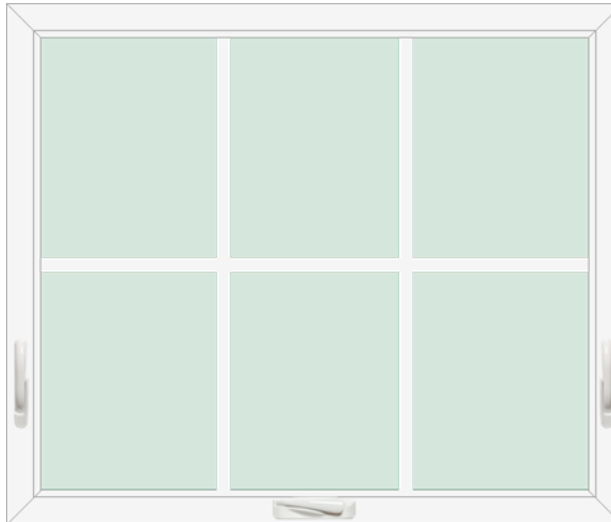

INSIDE VIEW

SIZING

Opening Width Range: 33 1/4" to 33 1/2"
Opening Height Range: 28 1/8" to 28 3/8"
Window Size: 33" x 27 7/8"
United Inches: 61
Operable Sash Size: 31 3/8" x 26 1/4"
Operable Glass Size: 29 1/4" x 24 1/8" x 3/4"
Operable Glass Viewable: 28 3/8" x 23 1/4"
Size:
Full Screen: 29 5/16" x 24 3/16"
Casement Screen Notch: 7 15/16"

Structural

Product: Vinyl Awning
Cert #: 462-H-011.01
Class: LC-PG60
Max Test Size: 48" x 32"
Test Std: AAMA/WDMA/CSA
101/1.S.2/A440-08/-11/-17



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.26 **0.25**

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance Condensation Resistance

0.47 **59.00**

Air Infiltration (cfm/ft2)

<= 0.02

CPD: PRD-N-104-01609-00002

QUOTE INFORMATION

Job: Schuetz
PO #JASON
Order #13323518-10
Qty: 5

DETAILS

Endure Window - EN600 Series

631 - 1-Lite Awning (Operable)

White

Exact Size: 33" x 27 7/8"

ROTO Hardware

White Lock-out Crank Handle

INNERGY Thermal Sash Reinforcement

Extruded Full Screen (White) with BetterVue

Screen Mesh

Graphite Foam Insulation

Sill Extender

ComforTech DLA

Double Strength Glass (1/8" per pane)

3/4" IG Thickness


Colonial (Standard) Flat Grid - 2V x 1H

White Grids


YOUR PROFESSIONAL-CLASS PRODUCT

605-692-6800
505 1st St. S
Brookings, SD 57006

Endure EN600 Series 601 - Double Hung

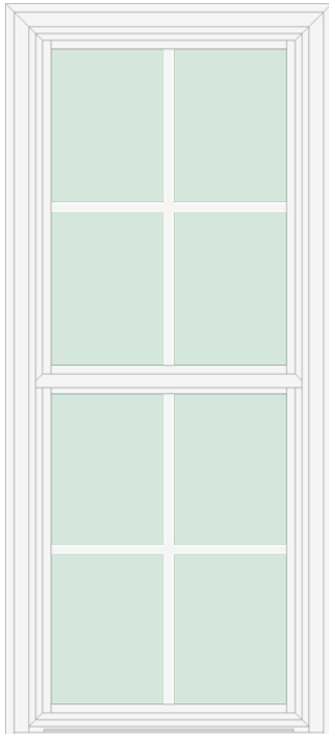

OUTSIDE VIEW

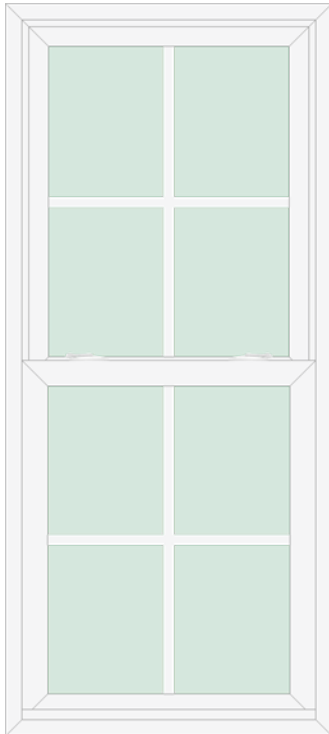

INSIDE VIEW

QUOTE INFORMATION

Job: Schuetz
PO #JASON
Order #13323518-11
Qty: 2

DETAILS

Endure Window - EN600 Series
601 - Double Hung
White
Exact Size: 23 7/8" x 53 5/8"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Vent Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Full Screen (White) with BetterVue Screen Mesh
With Screen Mullion
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Double Strength Glass (1/8" per pane)
3/4" IG Thickness
Colonial (Standard) Flat Grid - 1V x 1H
White Grids

SIZING

Opening Width Range: 24 1/8" to 24 3/8"
Opening Height Range: 53 7/8" to 54 1/8"
Window Size: 23 7/8" x 53 5/8"
United Inches: 78
Egress Size: 18 7/8" x 19 15/32"
Egress Square Foot: 2.5559
Egress Meets Criteria: No
Top Sash Size: 19 7/8" x 25 3/8"
Top Glass Size: 18 1/16" x 23 5/8" x 3/4"
Top Glass Viewable Size: 17 1/16" x 22 5/8"
Bottom Sash Size: 20 7/8" x 26 3/8"
Bottom Glass Size: 18 1/16" x 23 5/8" x 3/4"
Bottom Glass Viewable Size: 17 1/16" x 22 5/8"
Size:
Full Screen: 20 5/16" x 51"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.S.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS
U-Factor (U.S./I-P) Solar Heat Gain Coefficient
0.27 0.25

ADDITIONAL PERFORMANCE RATINGS
Visible Transmittance Condensation Resistance
0.48 60.00
Air Infiltration (cfm/ft2)
<= 0.05

CPD: PRD-N-101-01633-00006
STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung


605-692-6800
505 1st St. S
Brookings, SD 57006

QUOTE INFORMATION


Job: Schuetz
PO #JASON
Order #13323518-12
Qty: 1

DETAILS

Endure Window - EN600 Series
601 - Double Hung
White
Exact Size: 34" x 53 5/8"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Vent Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Full Screen (White) with BetterVue Screen Mesh
With Screen Mullion
Graphite Foam Insulation
Sill Extender
ComforTech DLA
Single Strength Glass (3/32" per pane)
3/4" IG Thickness
Colonial (Standard) Flat Grid - 2V x 1H
White Grids

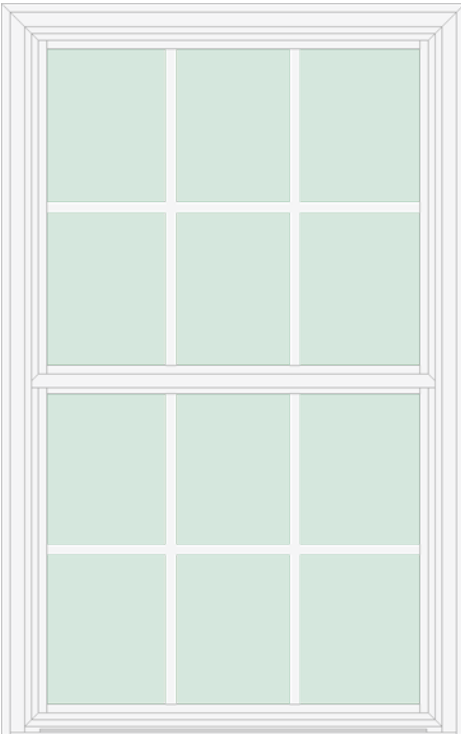

OUTSIDE VIEW

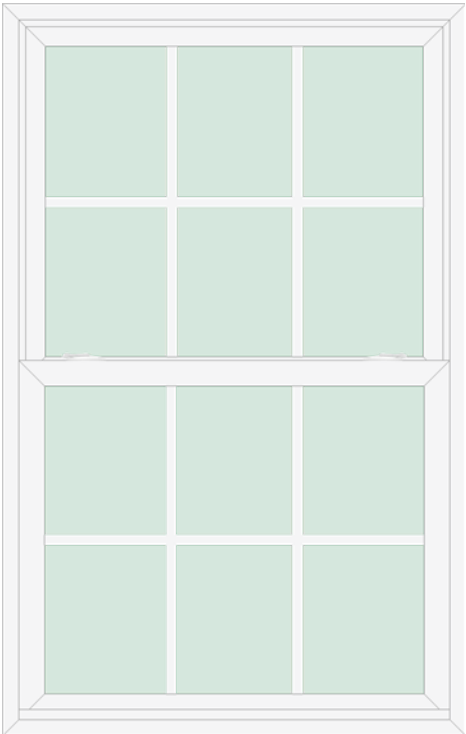

INSIDE VIEW

SIZING

Opening Width Range: 34 1/4" to 34 1/2"
Opening Height Range: 53 7/8" to 54 1/8"
Window Size: 34" x 53 5/8"
United Inches: 88
Egress Size: 29" x 19 15/32"
Egress Square Foot: 3.9269
Egress Meets Criteria: No
Top Sash Size: 30" x 25 3/8"
Top Glass Size: 28 3/16" x 23 5/8" x 3/4"
Top Glass Viewable Size: 27 3/16" x 22 5/8"
Bottom Sash Size: 31" x 26 3/8"
Bottom Glass Size: 28 3/16" x 23 5/8" x 3/4"
Bottom Glass Viewable: 27 3/16" x 22 5/8"
Size:
Full Screen: 30 7/16" x 51"

Structural

Air:
0.05 cfm/ft² @ 1.57 psf
ASTM E 283

Water:
7.52 psf
ASTM E 547

Structural:
LC-PG50 141mph
AAMA/WDMA/CSA 101/LS.2/A440-08 and 11
DP 50

ENERGY

ENERGY PERFORMANCE RATINGS
U-Factor (U.S./I-P) Solar Heat Gain Coefficient
0.27 **0.26**

ADDITIONAL PERFORMANCE RATINGS
Visible Transmittance Condensation Resistance
0.48 **60.00**
Air Infiltration (cfm/ft²)
<= 0.05

CPD: PRD-N-101-01633-00002
STC: 25; OITC: 22; Acoustic Test Report: f2964.01-113-11