

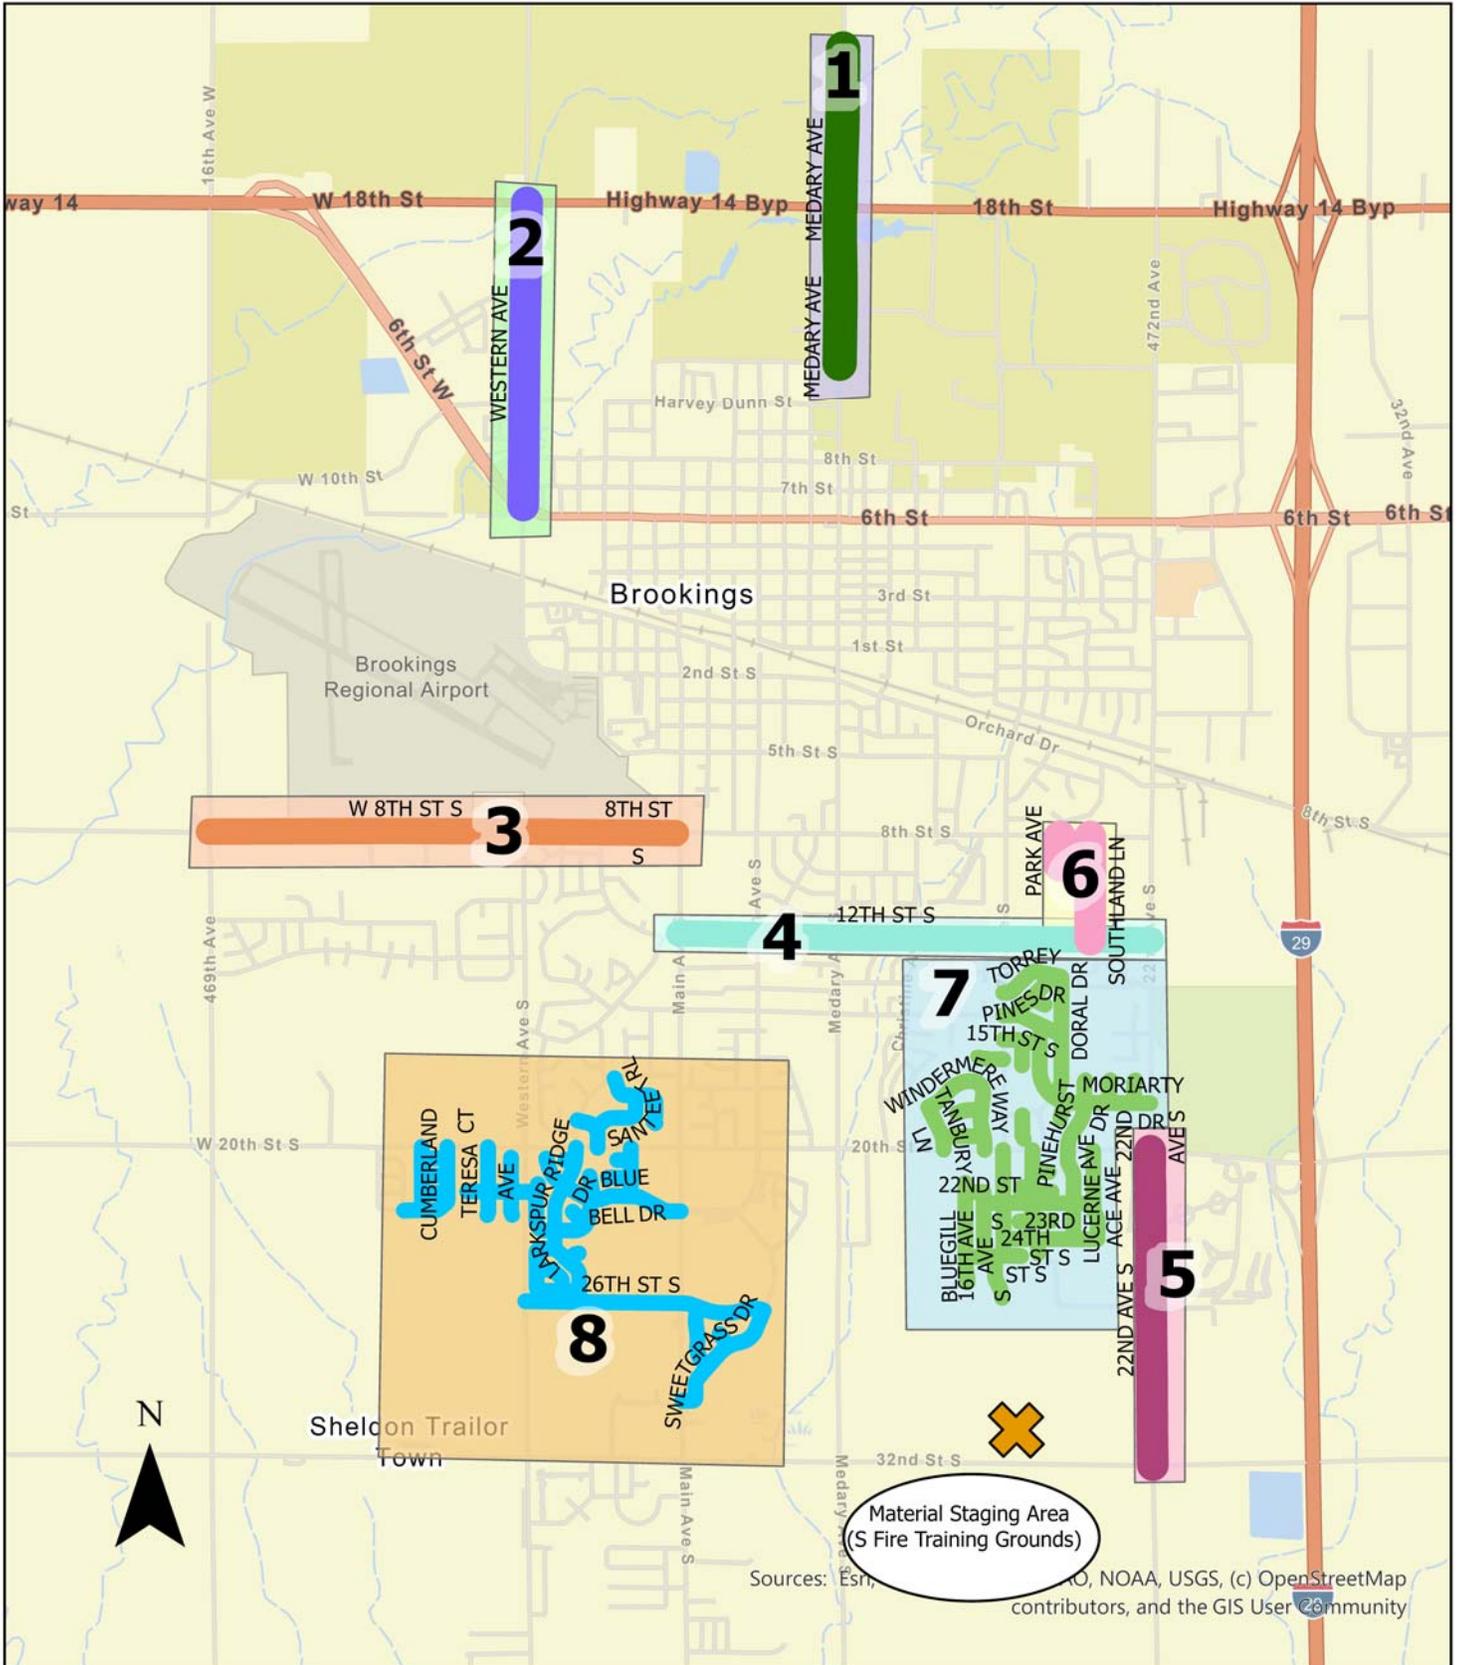


# CITY OF BROOKINGS 2026 SLURRY SEAL AREAS

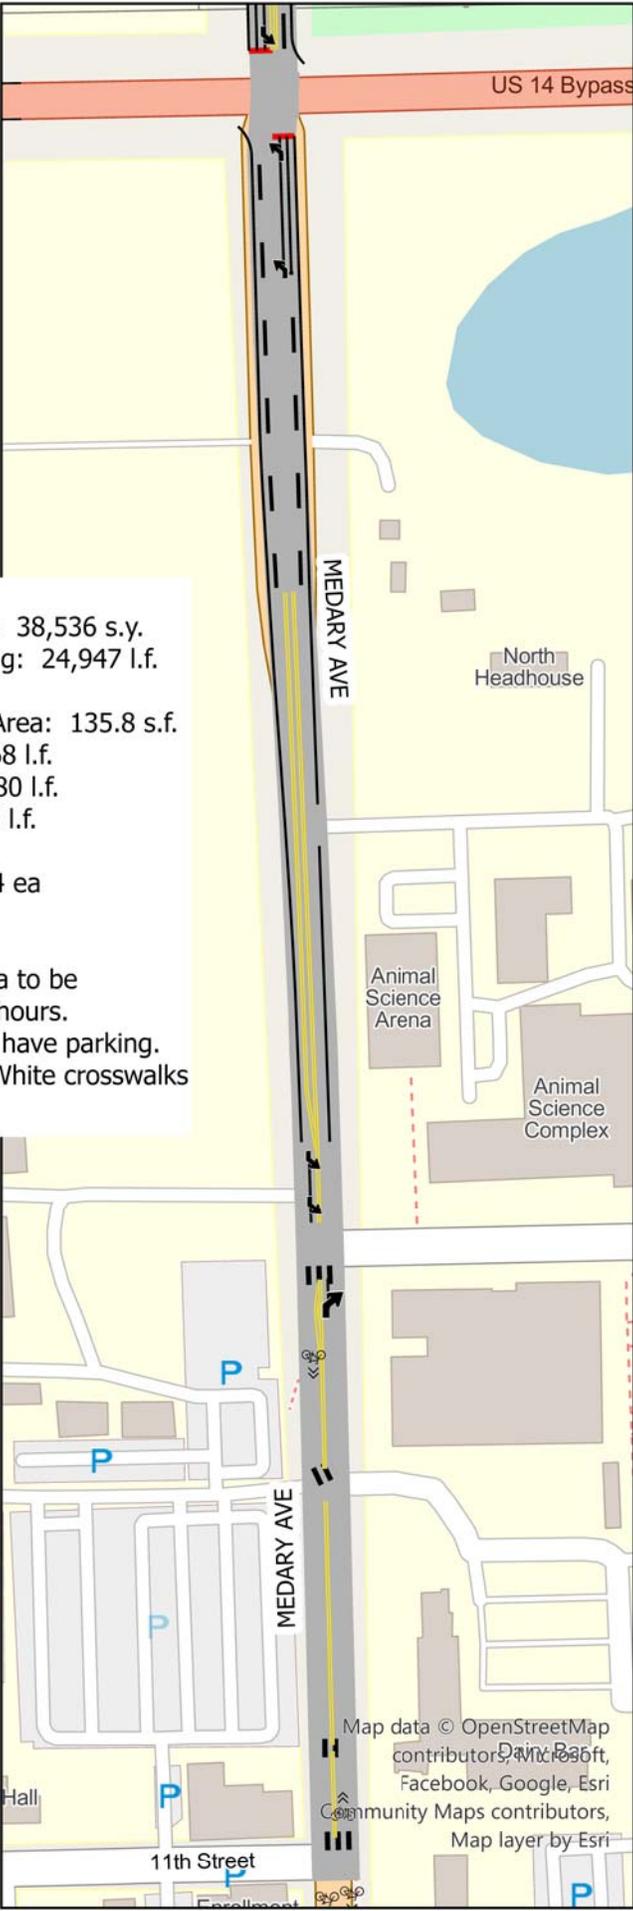

# Area 1: North Medary Avenue

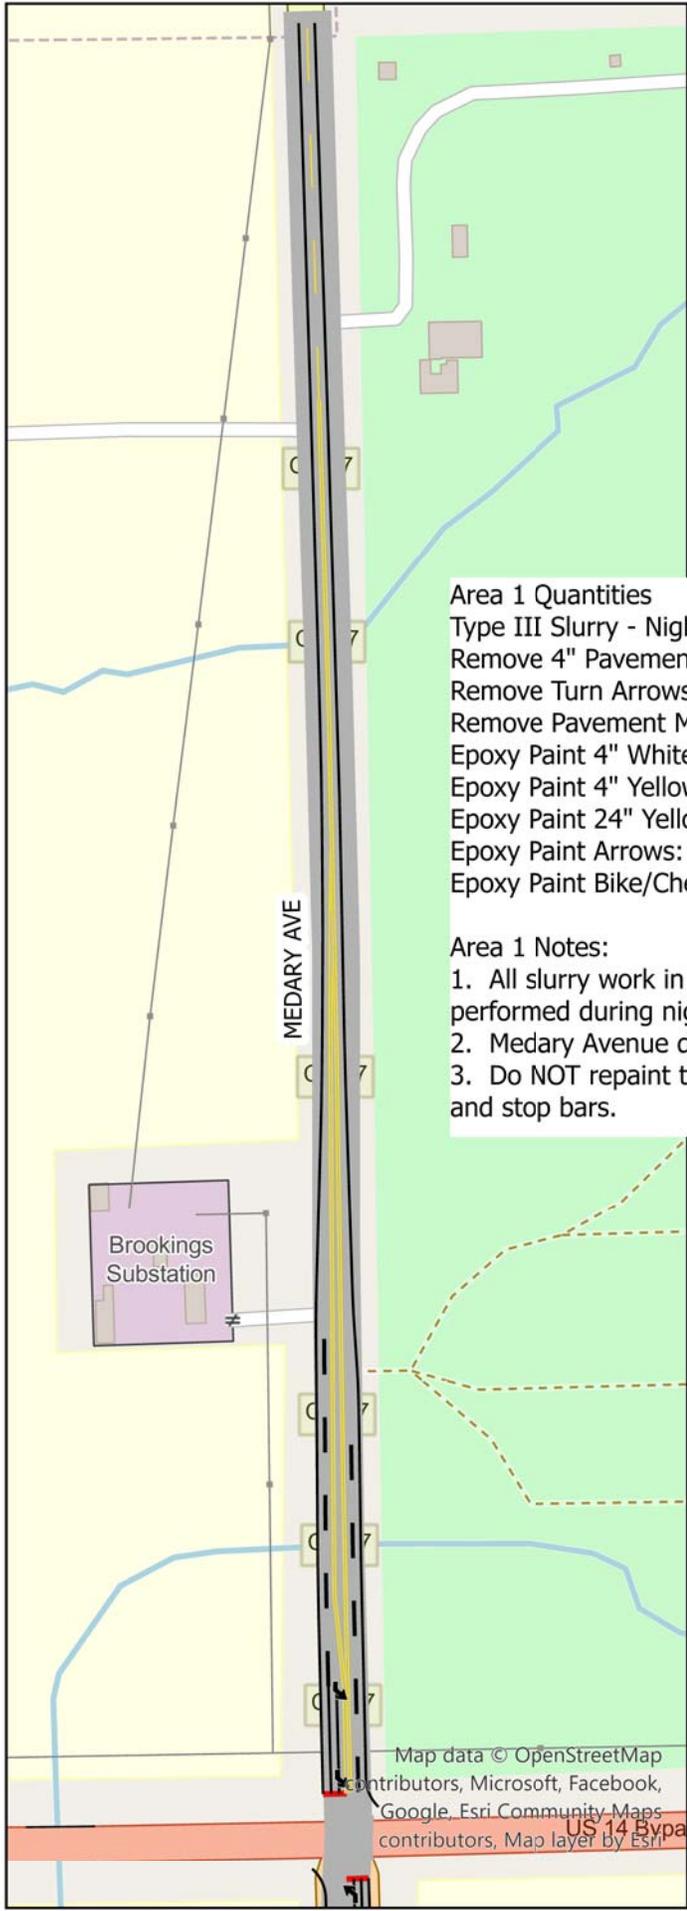

**Area 1 Quantities**  
 Type III Slurry - Night Work: 38,536 s.y.  
 Remove 4" Pavement Marking: 24,947 l.f.  
 Remove Turn Arrows: 7 ea  
 Remove Pavement Marking Area: 135.8 s.f.  
 Epoxy Paint 4" White: 10,368 l.f.  
 Epoxy Paint 4" Yellow: 14,580 l.f.  
 Epoxy Paint 24" Yellow: 318 l.f.  
 Epoxy Paint Arrows: 7 ea  
 Epoxy Paint Bike/Chevron: 4 ea

**Area 1 Notes:**  
 1. All slurry work in this area to be performed during nighttime hours.  
 2. Medary Avenue does not have parking.  
 3. Do NOT repaint the 24" White crosswalks and stop bars.

Map data © OpenStreetMap contributors, Microsoft, Facebook, Google, Esri, Community Maps contributors, Map layer by Esri

Map data © OpenStreetMap contributors, Microsoft, Facebook, Google, Esri, Community Maps contributors, Map layer by Esri

## Area 2: Western Avenue




### Area 2 Quantities

Type III Slurry - Night Work: 18,543 s.y.  
Remove 4" Pavement Marking: 12,522 l.f.  
Epoxy Paint 4" White: 9,128 l.f.  
Epoxy Paint 4" Yellow: 3,394 l.f.

### Area 2 Notes:


1. All slurry work in this area to be performed during nighttime hours.
2. Western Avenue does not have parking.

Map data © OpenStreetMap contributors, Microsoft, Facebook, Google, Esri  
Community Maps contributors,  
Map layer by Esri

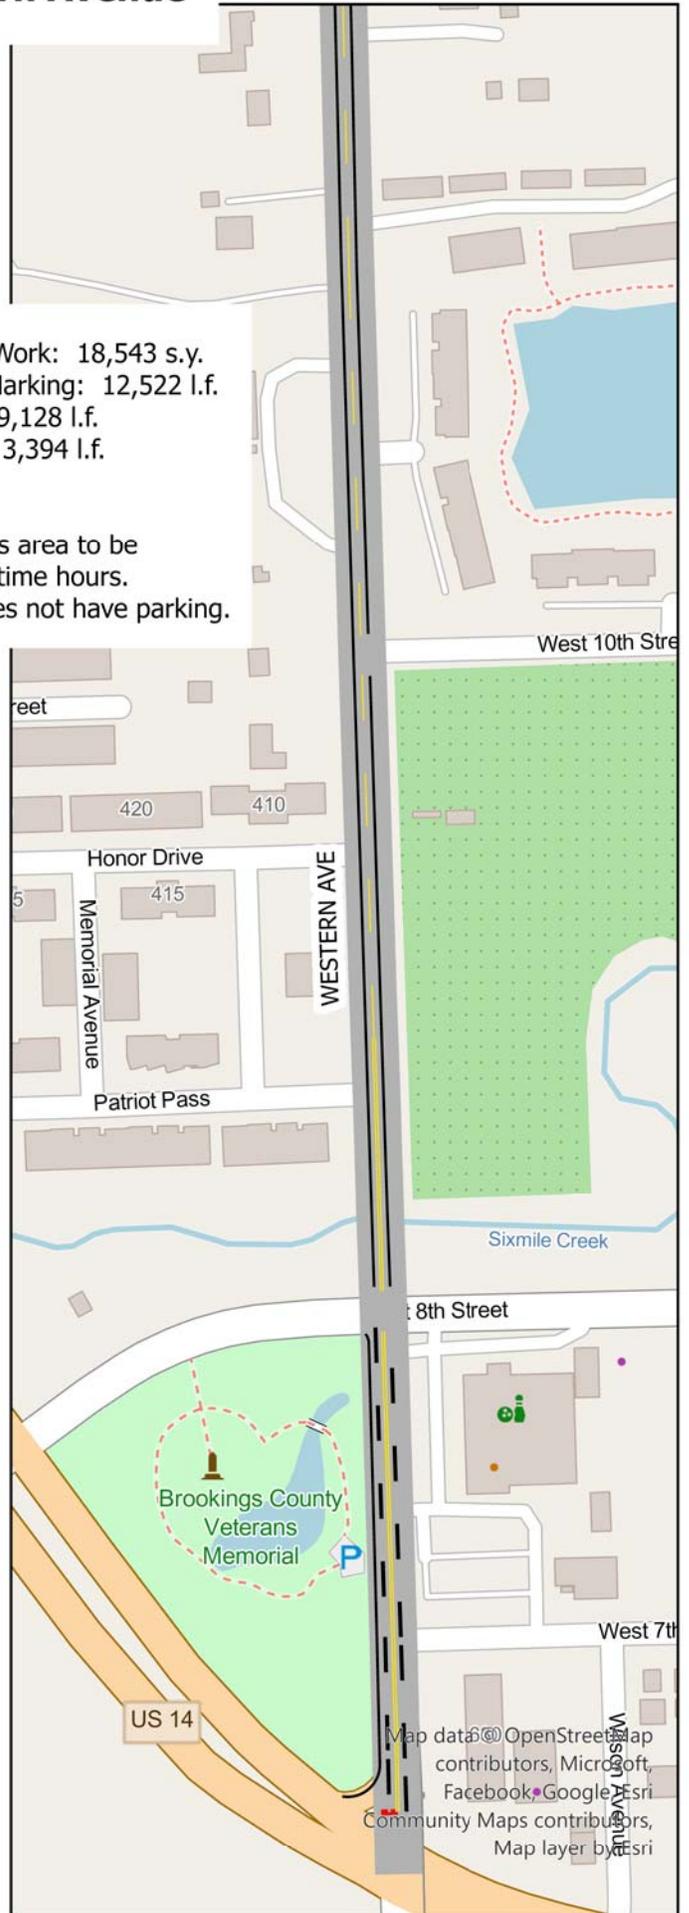

Map data © OpenStreetMap contributors, Microsoft, Facebook, Google, Esri  
Community Maps contributors,  
Map layer by Esri

# Area 3: West 8th Street South

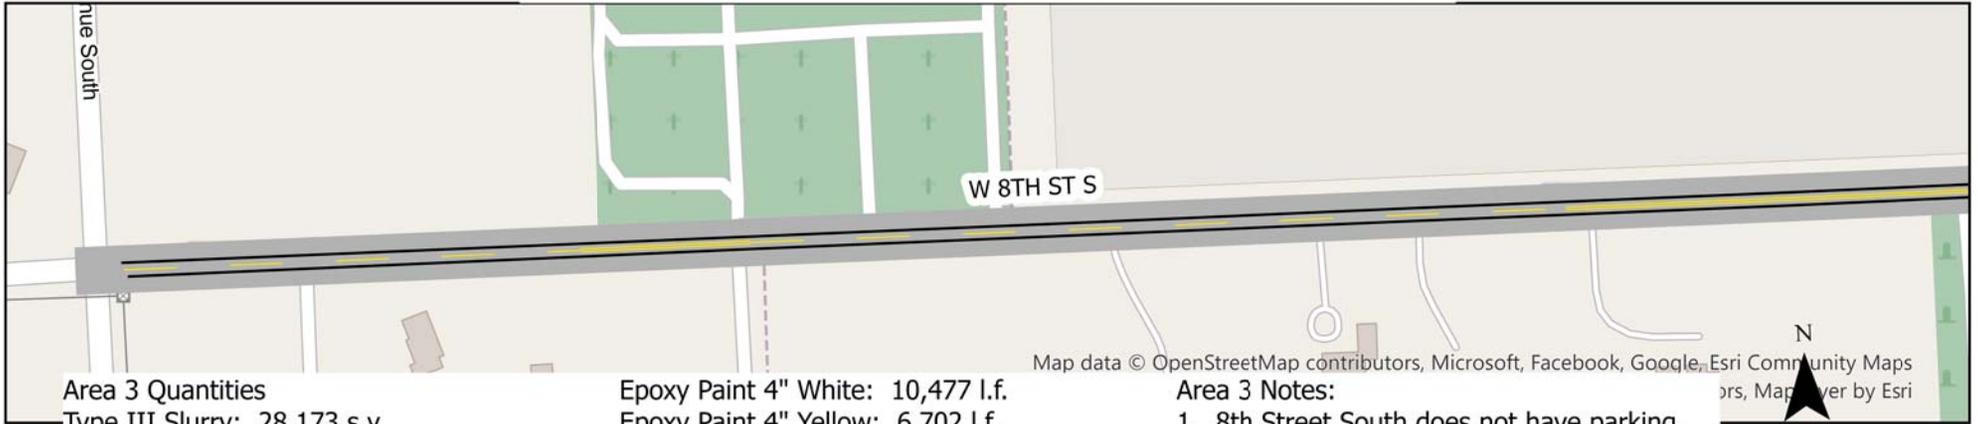



### Area 3 Quantities

Type III Slurry: 28,173 s.y.  
 Remove 4" Pavement Marking: 17,179 l.f.  
 Remove Turn Arrows: 2 ea

Epoxy Paint 4" White: 10,477 l.f.  
 Epoxy Paint 4" Yellow: 6,702 l.f.  
 Epoxy Paint 24" Yellow: 28 l.f.  
 Epoxy Paint Arrows: 2 ea

### Area 3 Notes:

1. 8th Street South does not have parking.
2. Do NOT repaint the 24" White Stop bars

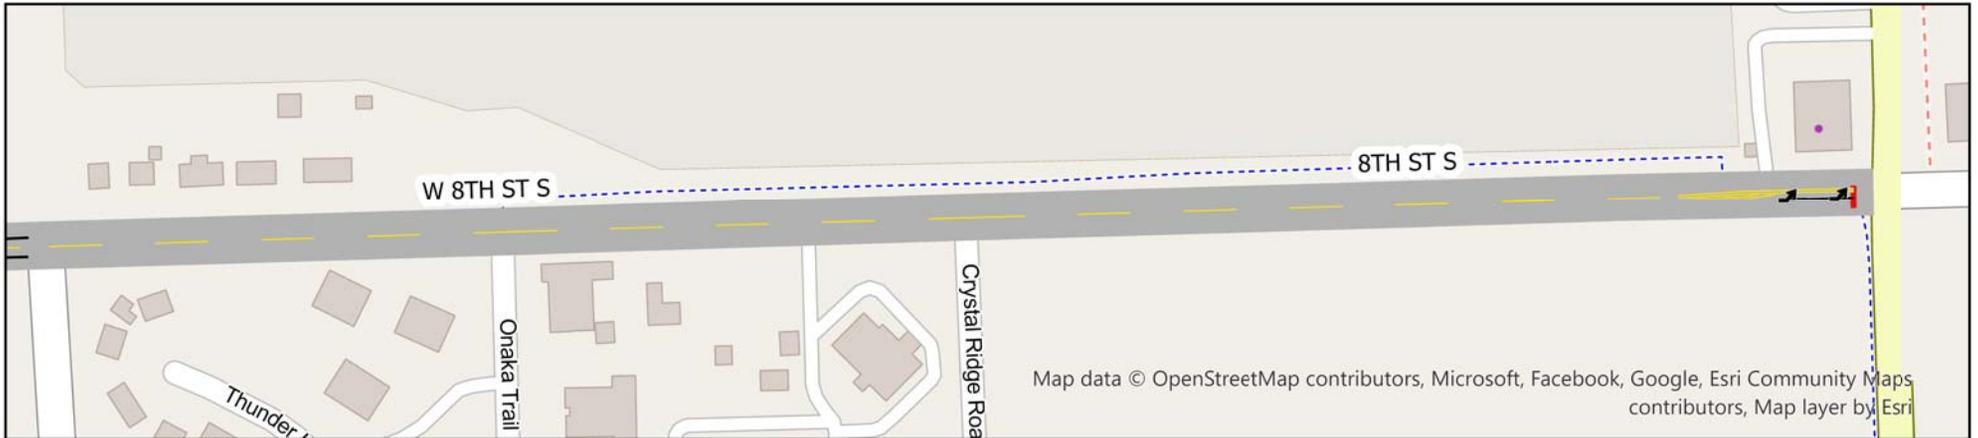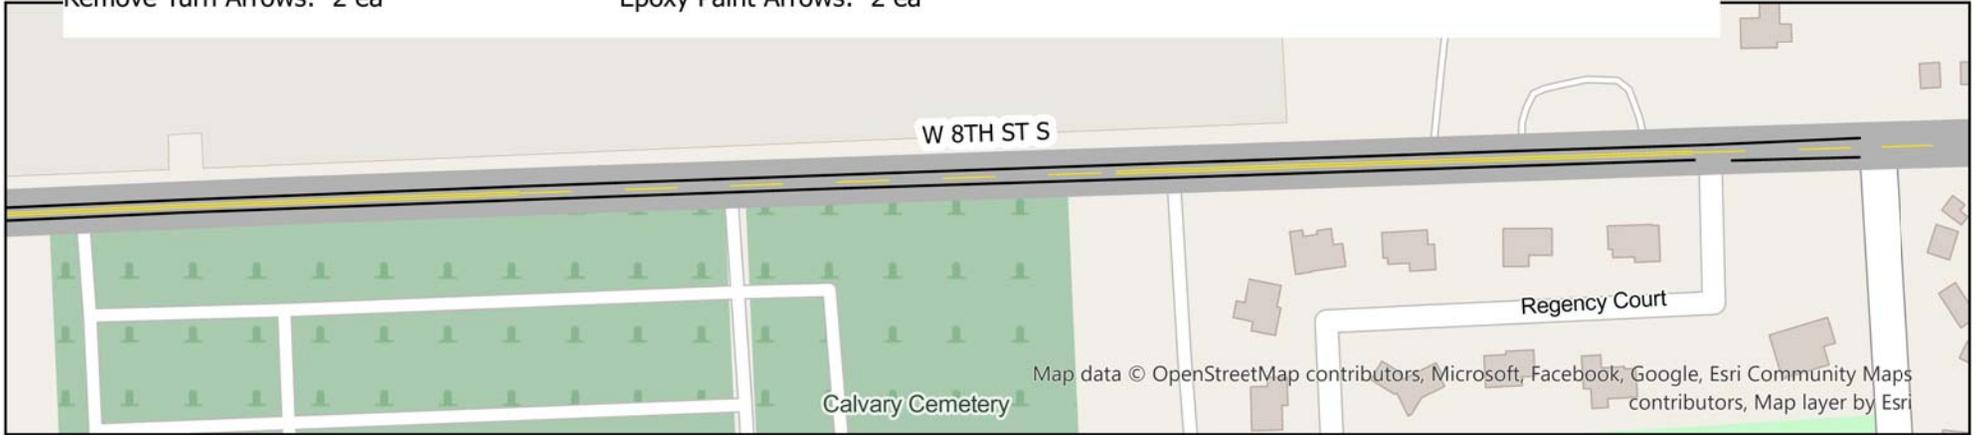

# Area 4: 12th Street South




### Area 4 Quantities

Type III Slurry: 22,888 s.y.  
 Remove 4" Pavement Marking: 3,335 l.f.  
 Remove Turn Arrows: 4 ea


Remove Marking Area: 814.8 s.f.  
 Epoxy Paint 4" White: 136 l.f.  
 Epoxy Paint 4" Yellow: 3,199 l.f.  
 Epoxy Paint Arrows: 4 ea

1. Contractor to notify residents of "No Parking" schedule
2. Do NOT repaint the 24" White Crosswalks and Stop bars.

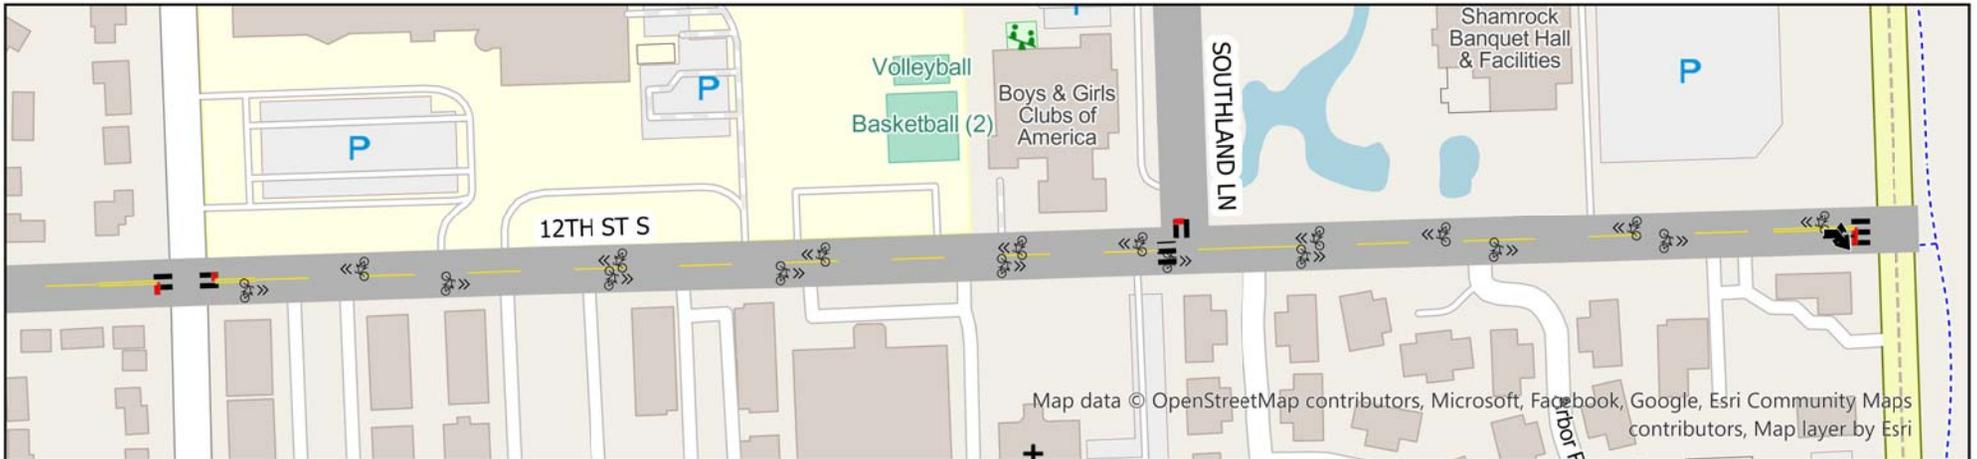

## Area 5: 22nd Avenue


## Area 6: Southland / Park Ave

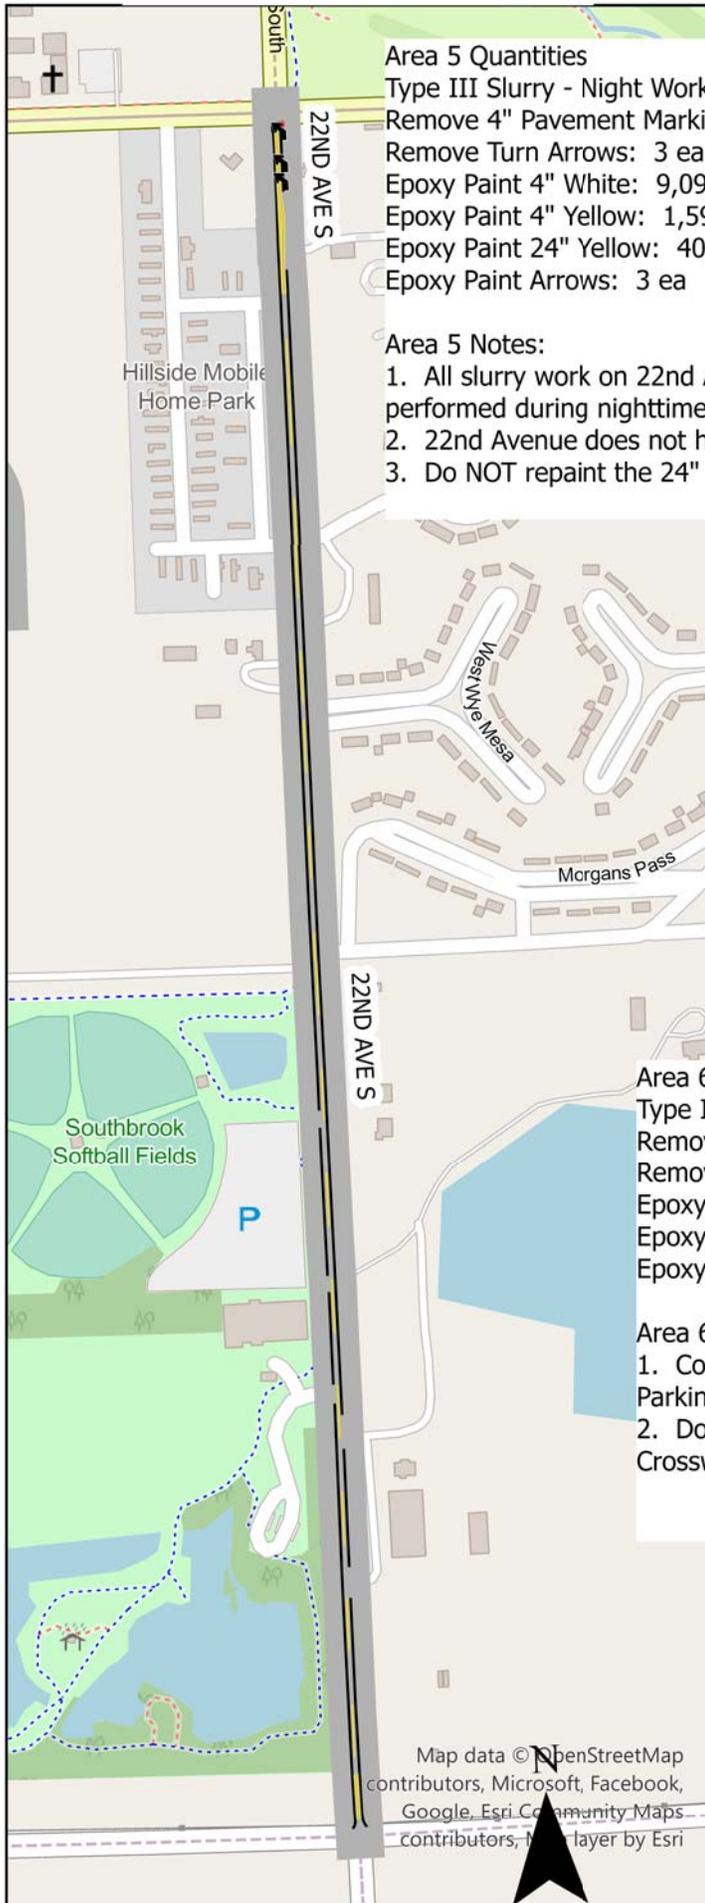

Area 5 Quantities  
Type III Slurry - Night Work: 17,303 s.y.  
Remove 4" Pavement Marking: 10,689 l.f.  
Remove Turn Arrows: 3 ea  
Epoxy Paint 4" White: 9,093 l.f.  
Epoxy Paint 4" Yellow: 1,596 l.f.  
Epoxy Paint 24" Yellow: 40 l.f.  
Epoxy Paint Arrows: 3 ea

### Area 5 Notes:

1. All slurry work on 22nd Ave to be performed during nighttime hours.
2. 22nd Avenue does not have parking.
3. Do NOT repaint the 24" White Stop bar

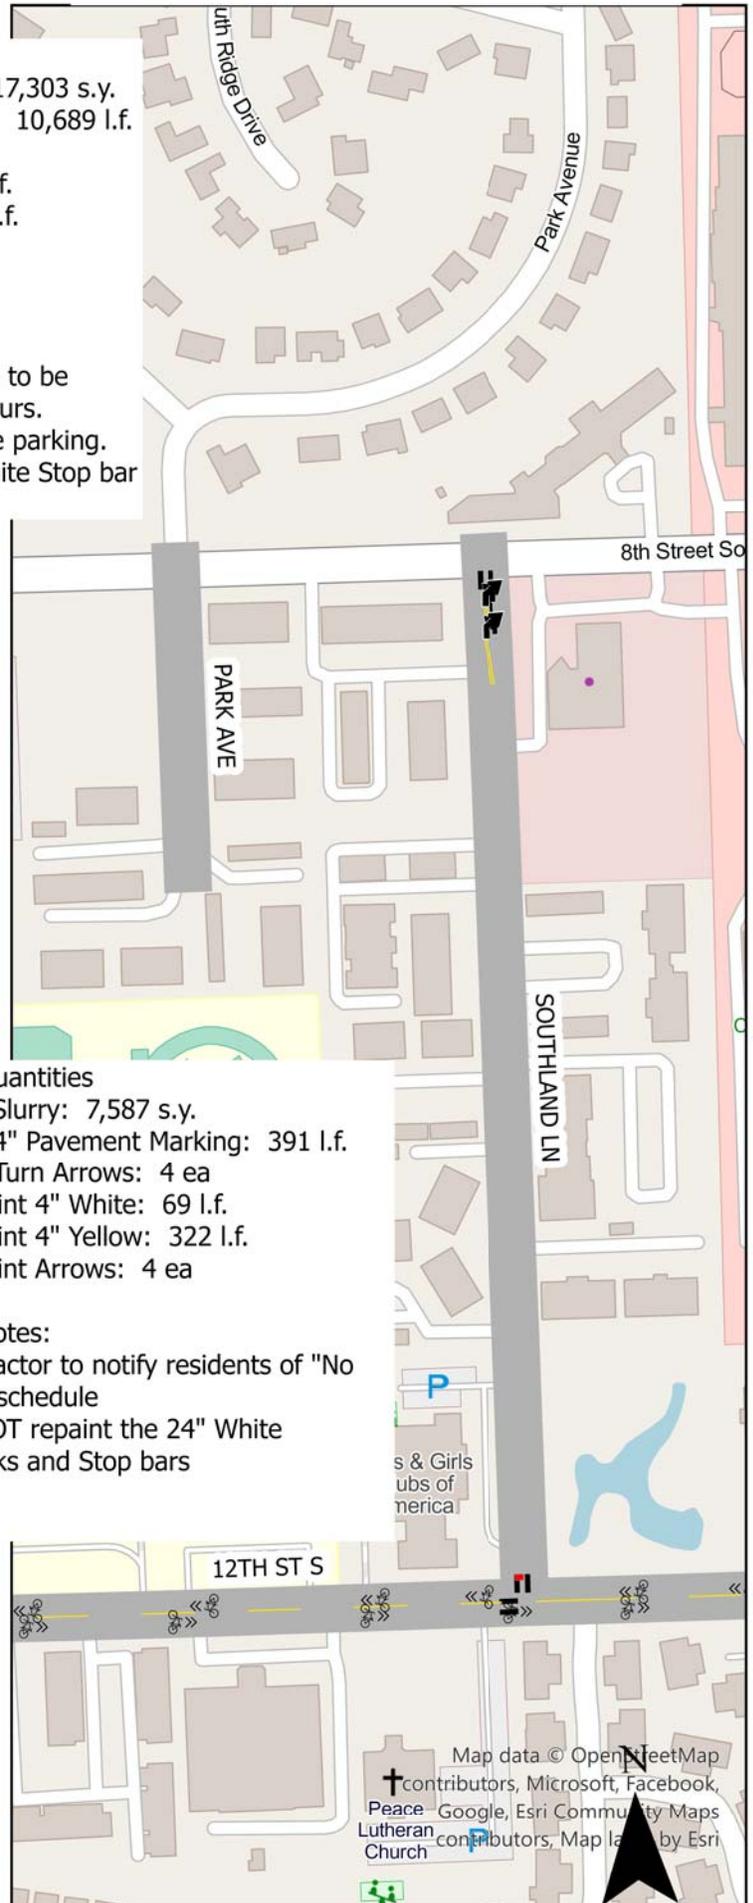

Area 6 Quantities  
Type III Slurry: 7,587 s.y.  
Remove 4" Pavement Marking: 391 l.f.  
Remove Turn Arrows: 4 ea  
Epoxy Paint 4" White: 69 l.f.  
Epoxy Paint 4" Yellow: 322 l.f.  
Epoxy Paint Arrows: 4 ea

### Area 6 Notes:

1. Contractor to notify residents of "No Parking" schedule
2. Do NOT repaint the 24" White Crosswalks and Stop bars



# Area 8: Valley View / Moriarty / Christie / Prairie Hills Addition

