




SHEET	C3.0
DATE	07/10/2020
REV1	08/07/2020
REV2	-
REV3	-
REV4	-
REV5	-

CHECKED BY:	EDC
DRAWN BY:	JGC
DESIGNED BY:	JGC

BARRETT'S WAREHOUSE ADDITION
610 12th Street South, Brookings, SD
SITE LAYOUT AND UTILITIES

Brosz Engineering, Inc.
2309 W. 50th St.
Sioux Falls, SD 57105
(605) 336-1676

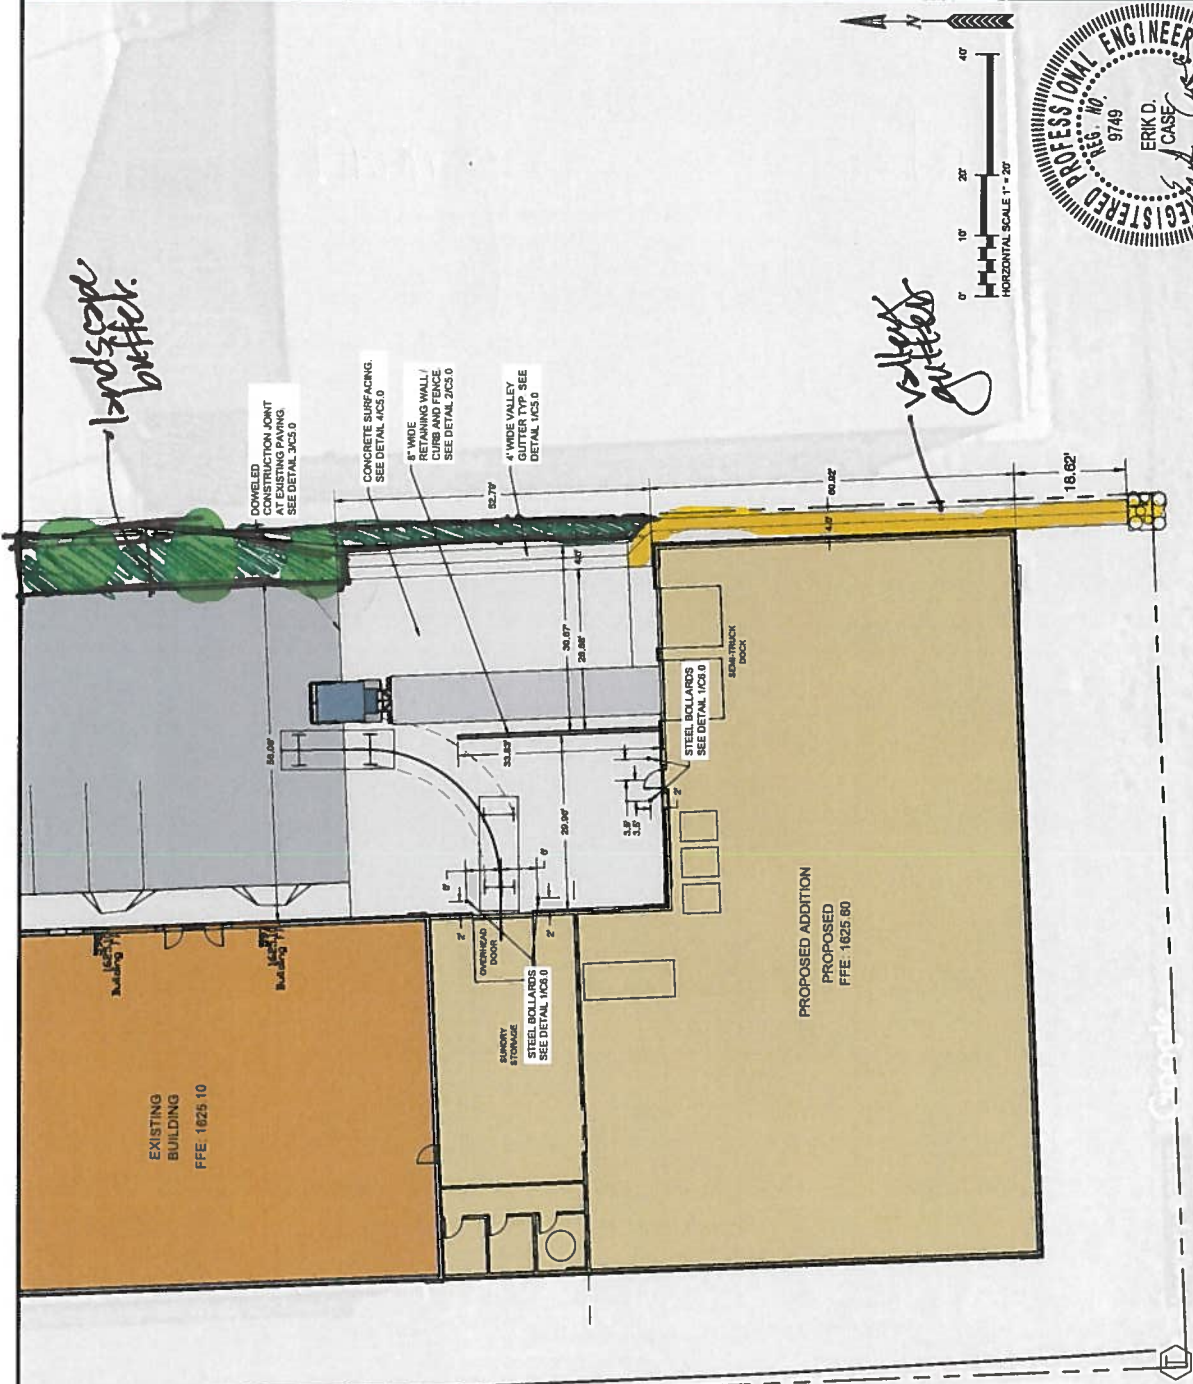

SITE LAYOUT GENERAL NOTES:

ALL REINFORCED CONCRETE CONSTRUCTION JOINTS SHALL BE KEVED AND DOWELED.

LOCATION OF EXPANSION JOINTS SHALL BE DETERMINED BY THE CONTRACTOR AND APPROVED BY THE ENGINEER PRIOR TO INSTALLATION.

PAVEMENT JOINTING SHALL BE SAWED AND SEALED. JOINT DEPTH SHALL BE 10 PAVEMENT THICKNESS OR 2" WHICHEVER IS GREATER. JOINTS SHALL BE PLACED IN A ROUGHLY SQUARE PATTERN AT 15' MAX SPACING. CONTRACTION JOINT SPACING ON LONG JUMP RUNWAYS SHALL BE ROUGHLY EQUAL TO THE WIDTH OF THE RUNWAY.

ALL CONCRETE JOINTS SHALL BE SEALED USING COLD APPLIED SILICONE JOINT SEALANT PER THE SDOOT APPROVED PRODUCTS LIST.